


Red Valve®

MUNICIPAL COLLECTION AND DISTRIBUTION
Total System Solutions



Total System Solutions


For more than 60 years, Red Valve products and technologies have saved millions of dollars. Managing storm water and sanitary flow while mitigating capacity loss and property damage from collection system backflow. It challenges every municipality. Red Valve's "Total System Solutions", from the collection system through the treatment process to final discharge, is achieved with dependable products providing cost-effective solutions for specific applications.

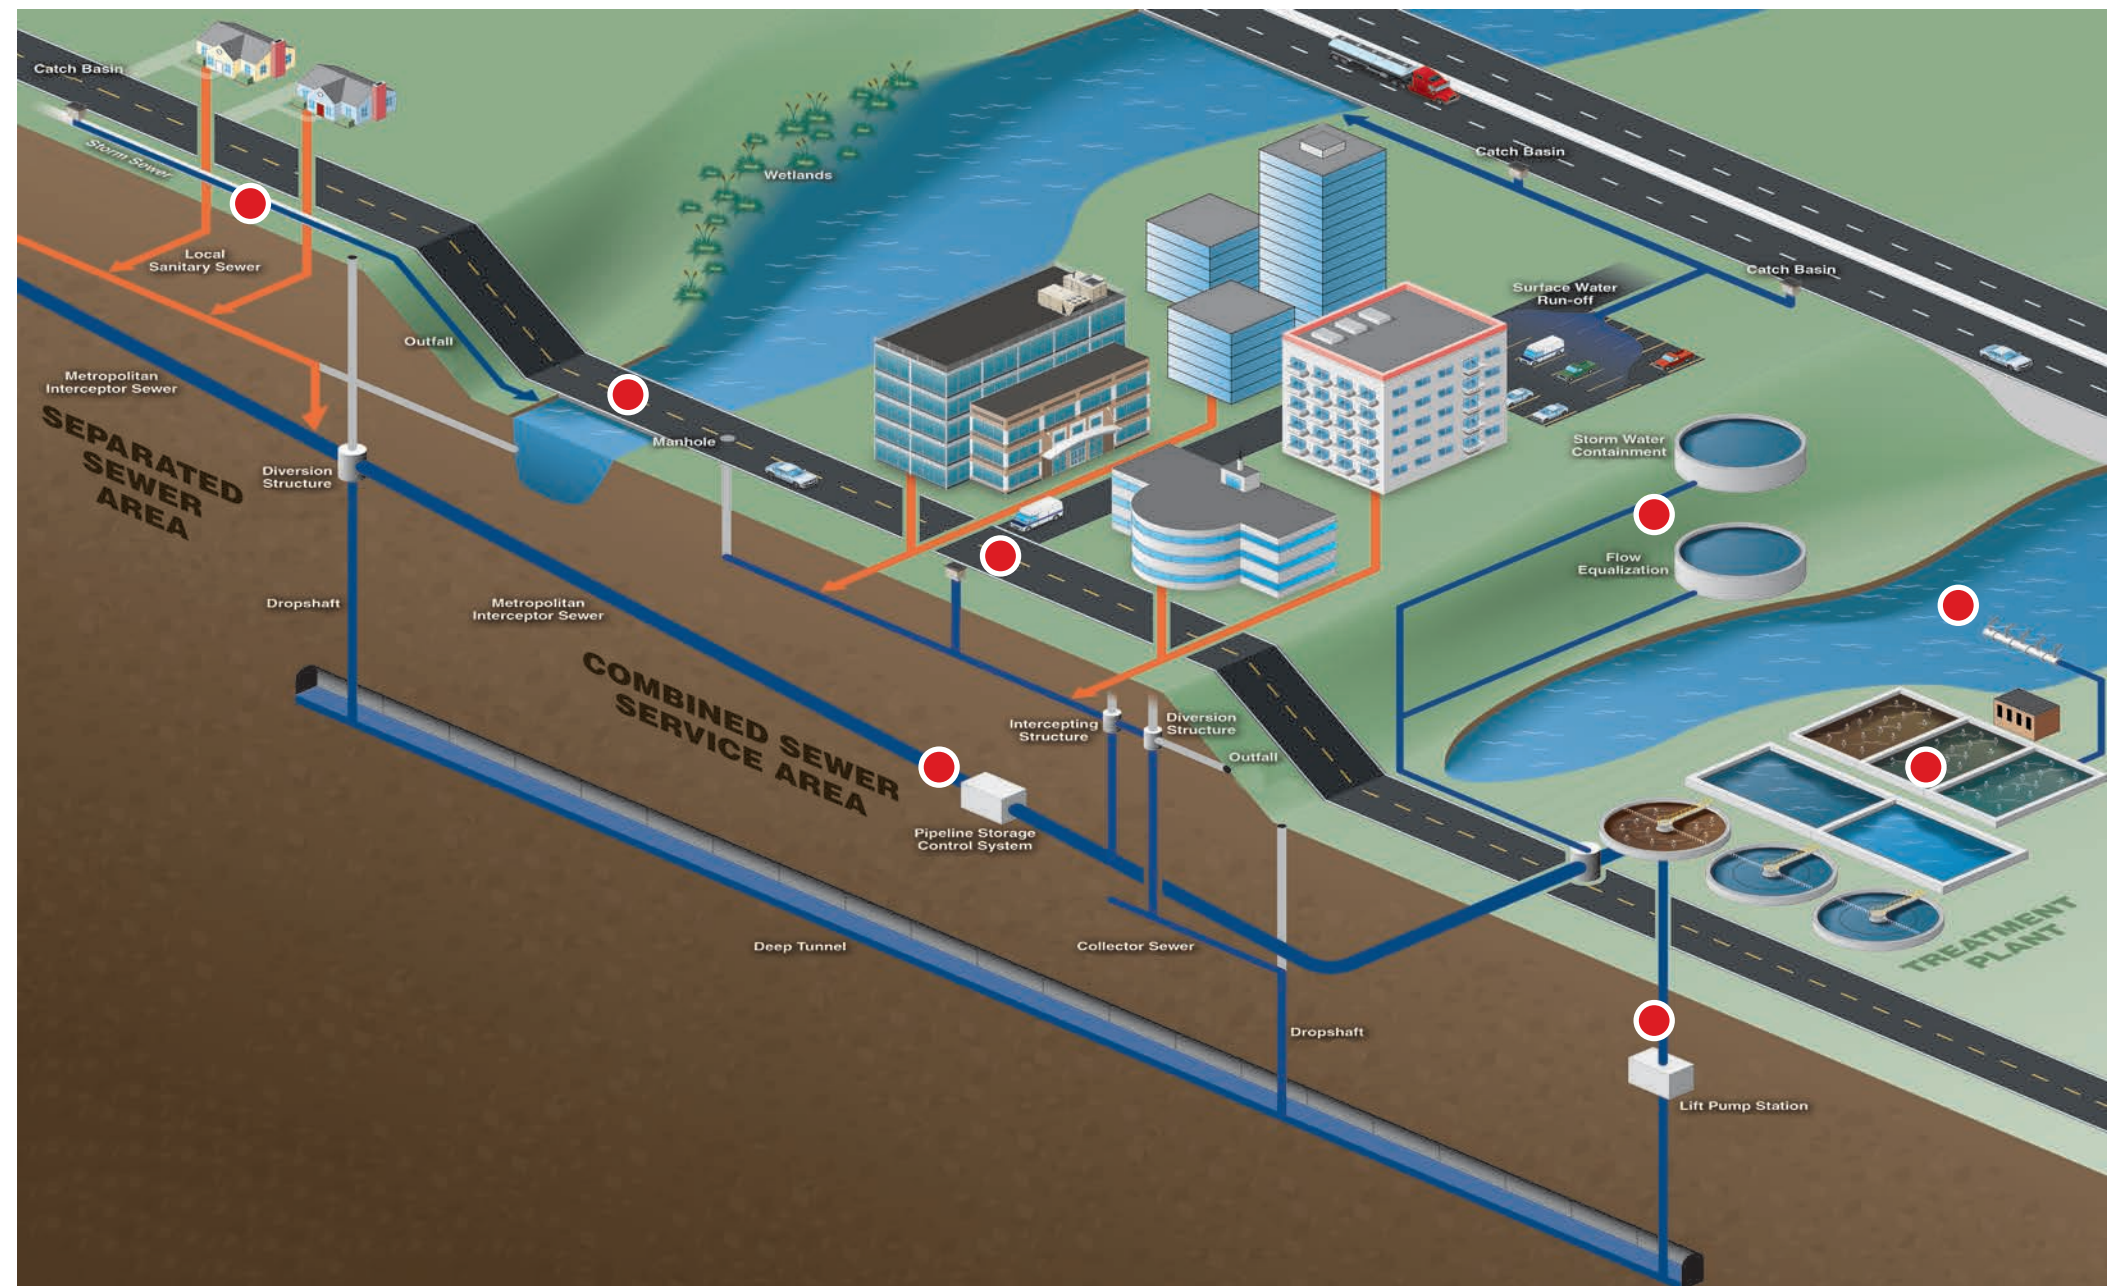

● Red Valve Product Solutions




CheckMate® In-Line Check Valves provide absolute backflow prevention while eliminating odors.

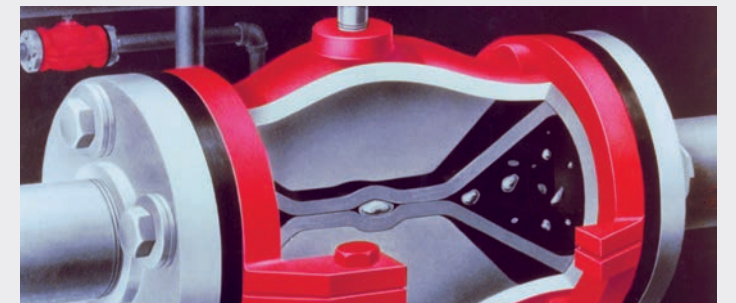


Red Valve Control Pinch Valves are ideal for controlling and diverting raw sewage, CSO, flow equalization and flow diversion.



Tideflex® Check Valves are the best choice to prevent unwanted backflow from rivers, streams and tides. They are also ideal for protecting overflow CSO, discharge and outfall lines.

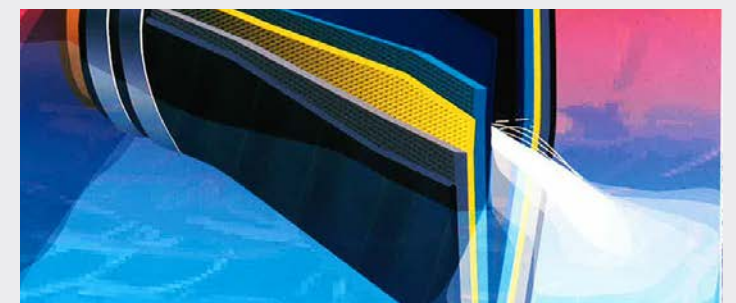

What sets Red Valve products apart from traditional valves is leading-edge elastomer technology. In addition to providing a superior flow pattern, the rubber sleeve provides unsurpassed abrasion and corrosion resistance, closing drop-tight around entrapped solids.



Protecting Stormwater, Sanitary, CSO, SSO, Interceptors and Overflow Lines



Red Valve products are used in combined sewer overflow (CSO), sanitary and SSO systems to protect unwanted backflow flowing into stormwater catchments during times of rising rivers, high tide and heavy rainfall. When these systems overflow, excess wastewater containing untreated human and industrial waste, toxic material, and debris is discharged directly into streams, rivers and lakes.

In 1984, the United States Environmental Protection Agency (EPA) commissioned Tideflex® Technologies to develop and test an alternative to flapgates valves. In their report, Development and Evaluation of a Rubber "Duck Bill" Tide Gate, the EPA states, "Increasing the reliability and performance of tidegates has a beneficial impact on the general pollution abatement program for the nation's waterways."

In response, Red Valve Company patented its elastomer "duckbill" Tideflex® Check Valve to eliminate the operational and maintenance problems associated with flapgates check valves, including corrosion of mechanical parts, freezing open or shut, warping and clogging due to entrapped debris.

Development and Evaluation of a Rubber "Duck Bill" Tide Gate

Peter A. Freeman, Angella B. Fomdon, and Richard Field

A unique 66 in. diameter "duckbill" rubber tide gate (RTG) was designed, fabricated, and installed in a typical New York City tide gate chamber. The operation of the RTG was observed over two years. The RTG was very effective in preventing the inflow of tidal waters and generally allowed equal or improved performance compared to a typical flap gate. Hydroclogging, the RTG was expected to open to release storm flows at a positive difference in upstream head of 6 to 10 in. and to remain closed preventing inflow as a downstream profile head up to eight ft during high tide. Minor inflow was observed when debris was introduced into the RTG, and capability of self-cleaning was exhibited. Inflow would be significantly greater if similar sized debris was lodged in the conventional flap-type gate. The duckbill RTG was observed to backflow during the normal operation of the gate. The water level upstream of the tide gate rose to whatever level is necessary to offset the weight of the gate and the water level downstream of the gate. When there is no upstream flow, the gate is firmly against the frame and the RTG is closed. Flapping operating tide gates do not permit tide inflow.


The conventional flap tide gate operates by swinging closed toward the receiving body of water when the upstream flow exceeds the capacity of the regulator controlling flows to the receiving body during storm conditions. The water level upstream of the tide gate rises to whatever level is necessary to offset the weight of the gate and the water level downstream of the gate. When there is no upstream flow, the gate is firmly against the frame and the RTG is closed. Flapping operating tide gates do not permit tide inflow.

The EPA rigorously tested and evaluated the Tideflex® Check Valve for two years and found that the valve showed, "Significant improvement over flapgates valves in terms of leakage inflow, entrapment of debris, capability to self clean and susceptibility to marine fouling." Since its creation in 1984, years of research and development, testing and proven performance have revolutionized backflow prevention and led to the development and advancement of the next generation of Tideflex® and CheckMate® Check Valves, today's most reliable valves for backflow prevention. The first Tideflex® Check Valve sold in 1984 is still in service, with more than 700,000 Tideflex® Check Valves solving a wide range of inflow and intrusion challenges around the world today.



Problem: Traditional flap gate valves get stuck open, allowing millions of gallons of water to go back into systems or treatment plants for re-treating.

Solution: Forward hydraulic pressure opens the valve's bill to allow flow, and reverse pressure seals the bill, preventing backflow. Every Tideflex® and CheckMate® Valve is custom built for each application, as well as independently tested and field validated to ensure maximum backflow prevention and minimum headloss.



Wetlands, Industrial Drainage, Airport and Highway Run-Off, and Odor Control




Like the legendary Tideflex® Check Valve, the CheckMate® Inline Check Valve has a 100% fabric and elastomer unibody construction that eliminates corrosion problems while providing absolute backflow prevention. There are no mechanical parts to catch debris, corrode or fail. Tideflex® Check Valves and CheckMate® Inline Check Valves are used extensively within large surface water areas that demand backflow prevention, such as airport runways, highways and parking lots - anywhere flowing or standing water presents a potential problem.

Tideflex® Check Valves protect runoff from hazardous spills, runoff from mining operations, leachate from landfills and in cases where saltwater is infiltrating protected wetland areas. Low-lying areas protected by levees depend on Tideflex® Check Valves to prevent surges from storms and tides from entering the collection system. The low cracking pressure of the valve allows easy draining, even when little difference in elevation exists.




Pump and Lift Stations play an important role in municipality collection and distribution systems. Wherever pumps are being used to move or lift fluids, Red Valve Pinch Valve products are the ideal choice.

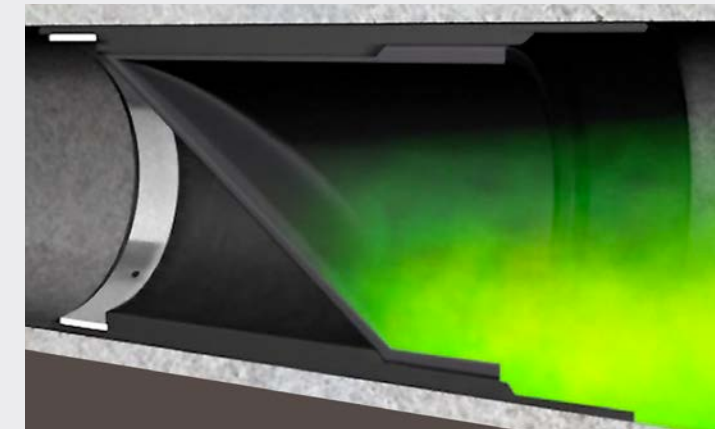

CheckMate® Inline Check Valves use state-of-the-art elastomers and fabric technology with no metal hinges, rivets, fasteners or moving parts. The valve's unibody construction is ideally suited for CSO and diversion chamber applications, installed at the upstream or downstream side of a diversion chamber. When used in interceptor and manhole installations, they prevent unwanted backflow and odors from damaging the community.

For an animated demonstration of the CheckMate® in operation, please visit: <http://www.tideflex.com/checkmate>



Flow Control, Equalization, Diversion, Deep Tunnel and In-Line Storage




One of the most challenging applications for any municipality is influent flow control. Red Valve's unique products such as the Type A Megaflex Valve are specifically designed to store, control and isolate stormwater flows within collection system piping. This control strategy minimizes combined sewer overflow volume and frequency.

Red Valve Pinch Valves, including the Type A Megaflex Valve, are designed to remain open for long periods of time and will still close drop tight when actuated, even on entrapped solids.

Sewage, stormwater and combined flow can then be stored within the pipeline or diverted to an EQ tank or deep tunnel and released to the treatment plant at a controlled pace for processing. The Type A Megaflex provides long-term reliability and is able to handle anything that can flow into sewer lines, including tree branches, plastic bags, bottles, sand and grit, wipes, aluminum cans and other residential debris.

Red Valve's Megaflex Valve shown in various open/closed positions. The highly durable elastomer sleeve closes drop-tight on entrapped solids. ▶

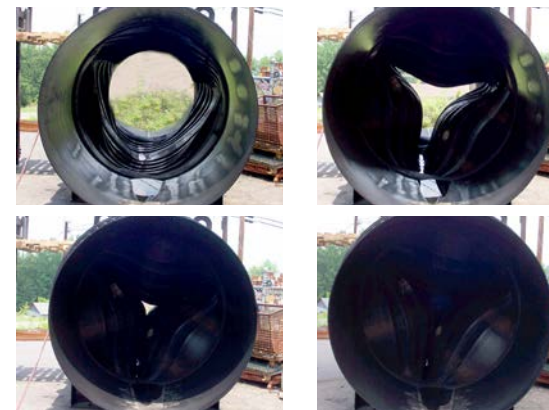


Red Valve Control Pinch Valves are available in sizes up to 84" and are the ideal choice for diverting and controlling flow from collection systems to EQ basins or detention tanks, along with flow from basin to plant.



Simple and efficient Tideflex® Check Valves, used as mixing and aeration nozzles, are the perfect solution for preventing stagnation in stormwater storage and detention basins.



The Type A Control Valve is highly effective handling concentrated sewage and abrasive grit, which often moves at a considerable velocity as it enters the treatment process.



Effluent Discharge, Single Point and Multi-Port Diffusers



Tidflex® Check Valves and CheckMate® In-Line Check Valves are proven, reliable components in Effluent Diffuser Systems designed to increase dispersion and eliminate backflow. During an overflow event, or final discharge, flow passes freely across the valve, with the benefit of preventing unwanted river, bay or ocean water from entering the collection system.

Tidflex® Effluent Diffuser Systems are used in land, rivers and lakes to reduce pollution levels, eliminate sticks, and reduce foaming, providing a proven long-term, maintenance-free service life while protecting outfalls from sand, grit, silt, nutrient pollution and marine growth that hinders performance and is costly to remove.




For Sub-Sea Multi-Port Effluent Diffuser Systems, Red Valve Engineers use CFD modeling, CORMIX and other software programs to exactly meet hydraulic specifications. All effluent diffuser systems come equipped with Redflex® Rubber Elbows and Risers, which increase flexibility and reduce the possibility of breakage.



Tidflex® Check Valves are the best choice to prevent unwanted backflow from rivers, streams and tides. They are also ideal for overflow CSO, discharge and outfall lines.



Red Valve provides complete, engineered Single and Multi-Port Effluent Diffuser Systems to improve the quality of discharge and help protect the environment.



Pump and Lift Stations



Pump and lift stations play a very large role in municipality collection and distribution systems. Wherever pumps are being used to move or lift fluids, Red Valve Pinch Valve products are the professional's choice for a wide range of pump and lift station applications.


Red Valve Knife Gate Valves combine a thin profile with a rugged bi-directional elastomer seat design that is ideal for pump isolation or bypass lines. Red Valve Knife Gate Valves are

manufactured with stainless steel wetted parts and a heavy duty gate specifically designed for clean water, abrasive or corrosive slurries.


Red Valve's In-Line Tideflex® Check Valves and Pinch Valves provide years of continuous, reliable performance in pumping applications.



Red Valve Pressure Sensors are used to protect pumps from running dry or over pressuring the line by providing accurate, dependable pressure movement. With full 360° pressure reading, Red Valve Sensors are the only sensors that will stay operational on difficult process fluids such as sewage, sludge and scum.

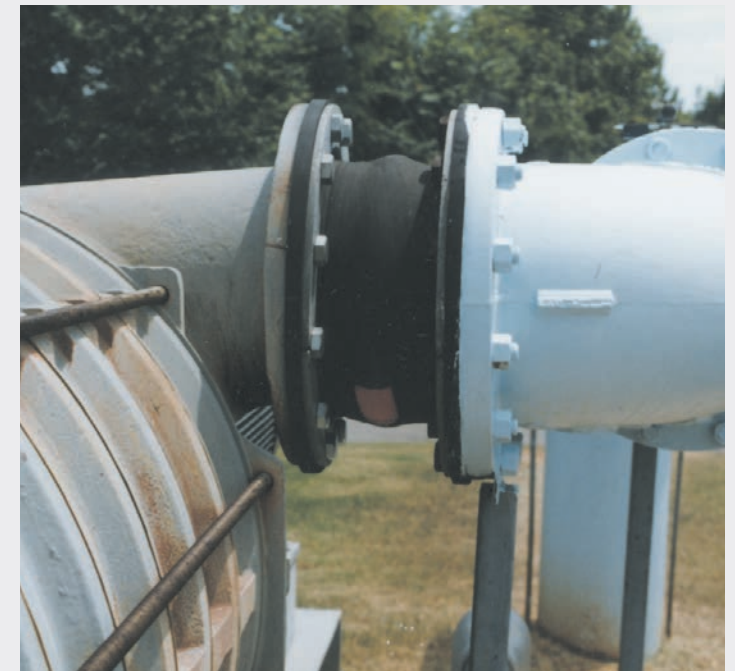

Redflex® Expansion Joints absorb vibration and compensate for pipe misalignment and movement. They help alleviate piping stress and reduce noise. Red Valve offers flanged and slip-on connections, single or multiple arches and a range of elastomers to meet process conditions, including Teflon®-lined joints for severely corrosive applications.



Unmatched Elastomer Expertise: The Red Valve Difference



Every Red Valve Pinch Valve Sleeve, along with every Tideflex® Check Valve and CheckMate® In-Line Check Valve, is hand-fabricated, utilizing a wide range of natural and synthetic elastomers and wire and fabric-reinforced plys. Red Valve has more Pinch and Check Valve elastomer knowledge and manufacturing experience than any other company in the world.


Independent Hydraulic Testing

Red Valve has conducted extensive independent hydraulic testing of Tideflex® Check Valves since the 1980's. With our extensive amount of test data, Red Valve has developed modeling programs used to provide hydraulic characteristic curves for every Tideflex® Check Valve.




In-House Testing

To supplement independent hydraulic testing, Red Valve continually conducts research and development and additional in-house testing to improve existing products and develop new products.

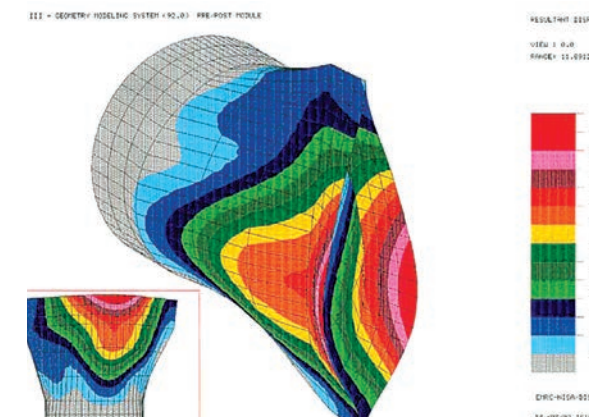


Finite Element Analysis (FEA)

Red Valve conducts extensive Finite Element Analysis to custom-engineer different elastomers for specific requirements, such as resilience, durometer, compression set resistance, tensile strength, force, deflection and elongation. Every Pinch Valve Sleeve, Tideflex® Check Valve and CheckMate® In-Line Check Valve is custom-engineered to meet your specific hydraulic needs.

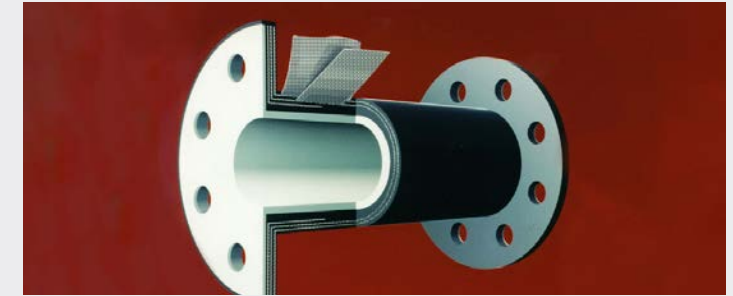


When you specify a Red Valve Pinch Valve, you can be confident knowing the internal elastomer sleeve is superior in design, construction, durability and performance. Every Red Valve pinch valve sleeve is backed by our unmatched elastomer technology, knowledge and manufacturing expertise.

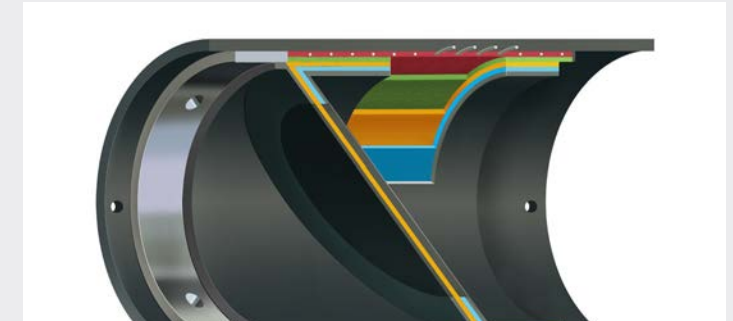

The One and Only CheckMate® In-Line Check Valve

One of the keys to the CheckMate® Valve's exceptional dependability and longevity is in the elastomer experience and knowledge no other company can match. Beware of imitations. The patented new CheckMate UltraFlex® Valve provides superior sealing with significantly less head pressure, no moving or metal parts and hinges or rivets to corrode or fail.

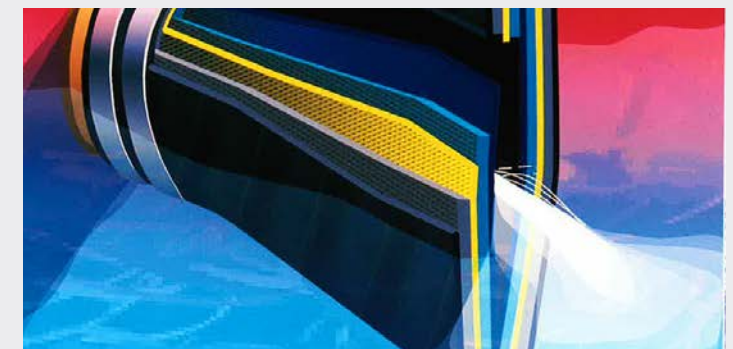

The Legendary Tideflex® Check Valve

Red Valve's Legendary Elastomer Technology and knowledge is the reason for the Tideflex® Check Valve's unrivaled performance. Every Tideflex® Valve is reinforced with various natural and synthetic plys, specifically engineered for your exact application.

Red Valve

Valve Selection Guide for Wastewater Treatment



Red Valve Company, Inc.

Tideflex
Technologies

600 N. Bell Avenue
Carnegie, PA 15106

PHONE:
412/279-0044


FAX:
412/279-7878

www.redvalve.com

The information presented in this catalog is provided in good faith. Red Valve Company, Inc. and Tideflex® Technologies reserves the right to modify or improve its design specifications without notice and does not imply any guarantee or warranty for any of its products from reliance upon the information contained herein. All orders are subject to Red Valve Company, Inc. and Tideflex® Technologies' standard terms and warranty and are subject to final acceptance by Red Valve Company, Inc. and Tideflex® Technologies.

Viton is a registered trademark of DuPont Dow Elastomers. Hypalon is a registered trademark of DuPont Performance Elastomers. Tideflex, Red Valve, and the Red Valve "rv" logo are registered trademarks of the Red Valve Company, Inc.

© 2016 Red Valve Company
All rights reserved.

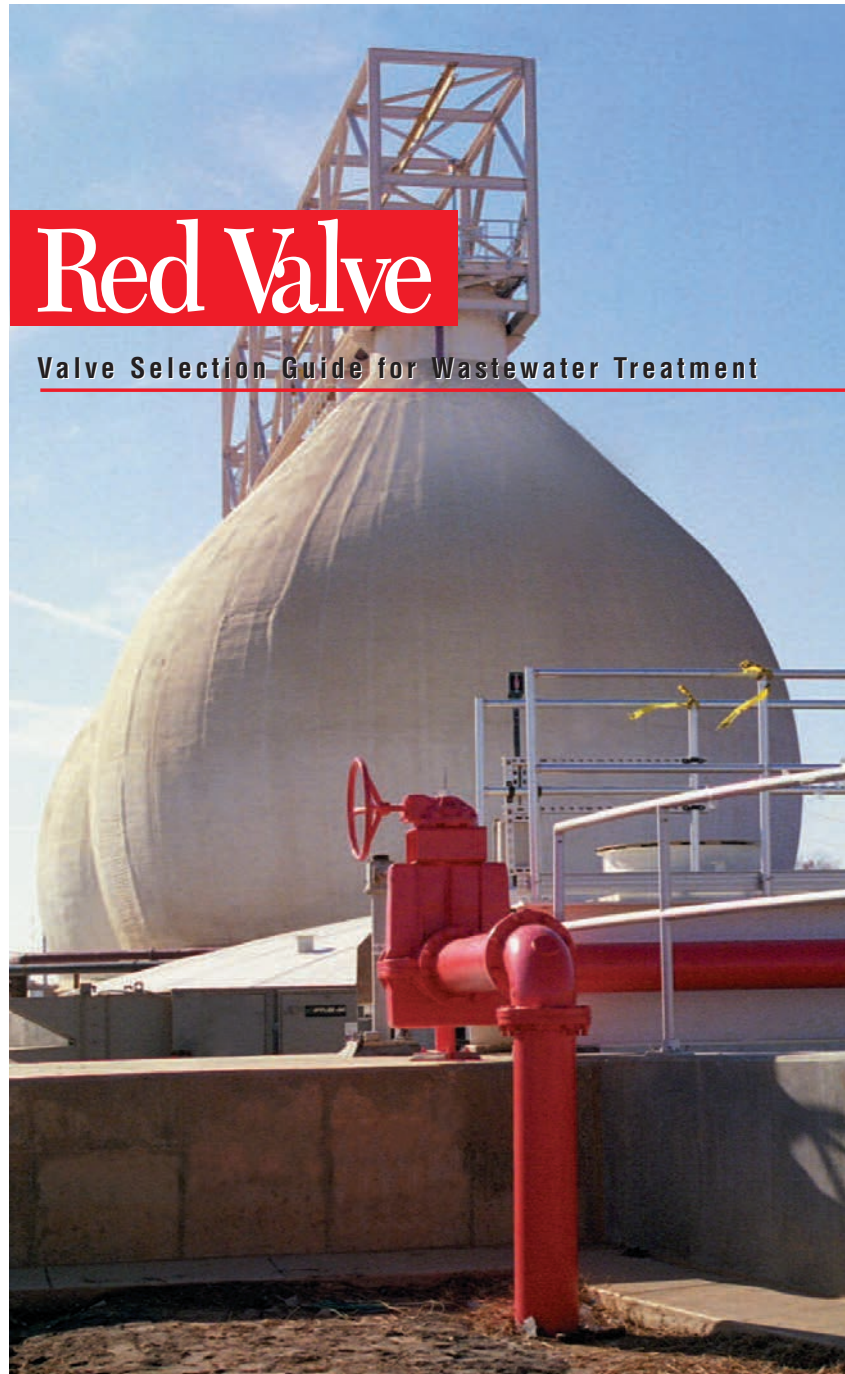

“Rely on Red” for a Total System Solution to Your Water and Wastewater Treatment Challenges

No other company can match Red Valve's "Total System Solution" for water and wastewater treatment plants. Since 1953, Red Valve has provided products for each phase of treatment - collection, separation, aeration, treatment and final discharge.

Our complete product line allows customers to use one source for all their slurry handling needs, including on/off and control valves, check valves, pressure measurement, expansion compensation, air diffusers and effluent diffusers. No other company provides such a complete approach to the wastewater process. All Red Valve products are designed to handle the rigors of handling raw sewage, sludge, scum and grit with abrasion-resistant, non-clogging designs.

Contact us today for a free copy of our Valve Selection Guide for Wastewater Treatment.